

晁元國際半導體股份有限公司
MaxPower SiC Semiconductor Co., Ltd.

Change History:

Date	Version	Change Item	Author
2023/7/28	V1.0	First release.	John Ruan

M1P-1200-1200D

All Silicon Carbide Power Module

1200V/1200A 2-in-1 SiC MOSFET EconoDual Power Module

Features

- Low $R_{DS(on)}$
- Low surge, low switching loss
- High-speed switching possible
- Silicon Nitride AMB substrate for high reliability
- Halogen Free, RoHS Compliant


Benefits

- Higher System Efficiency
- Reduced Cooling Requirements
- Increased Power Density
- Increased System Switching Frequency

Applications

- Motor drive
- Electrified vehicle traction inverter
- Photovoltaics, wind power generation
- Induction heating equipment

Equivalent Circuit Schematic



Maximum Ratings ($T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
V_{DSmax}	Drain - Source Voltage	1200	V		
V_{GSmax}	Gate - Source Voltage	-8/+25	V	Absolute maximum values	
V_{GSop}	Gate - Source Voltage	-5/+20	V	Recommended operational values	
I_D	Continuous Drain Current	1200 950	A	$V_{GS} = 20V, T_{VJ} = 25^\circ\text{C}$ $V_{GS} = 20V, T_{VJ} = 150^\circ\text{C}$	
$I_{D,peak}$	Repetitive peak drain current	2000	A	Pulsed Drain Current, t_p limited by T_{jmax}	
T_{VJ}, T_{stg}	Operating Junction and Storage Temperature	-55 to +175	$^\circ\text{C}$		
V_{ISO}	Isolation Test Voltage	3400		AC, 50Hz, 1 s	

晁元國際半導體股份有限公司
MaxPower SiC Semiconductor Co., Ltd.

Electrical Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	1200			V	$V_{GS}=0V, I_D=100\mu A$	
$V_{GS(th)}$	Gate Threshold Voltage	2.0	2.50	4.0	V	$V_{GS}=V_{DS}, I_{DS}=350mA, T_{VJ}=25^\circ C$	
			1.80			$V_{GS}=V_{DS}, I_{DS}=350mA, T_{VJ}=150^\circ C$	
I_{DSS}	Zero Gate Voltage Drain Current		110	840	μA	$V_{DS}=1200V, V_{GS}=0V$	
I_{GSS}	Gate-Source Leakage Current		260	1230	nA	$V_{GS}=20V, V_{DS}=0V$	
$R_{DS(on)}$	Drain-Source on-state Resistance		1.45	1.98	m Ω	$V_{GS}=20V, I_D=950A, T_{VJ}=25^\circ C$	
			2.2		m Ω	$V_{GS}=20V, I_D=950A, T_{VJ}=150^\circ C$	
C_{iss}	Input Capacitance		81.4		nF	$V_{GS}=0V, V_{DS}=800V, f=1MHz, V_{AC}=25mV$	
C_{oss}	Output Capacitance		4.8				
C_{rss}	Reverse Transfer Capacitance		0.62				
E_{ON}	Turn-On Switching Energy		35.2		mJ	$V_{DS}=800V, V_{GS}=-5/20V, I_D=950A, R_{G(ext)}=5\Omega, L=80\mu H, di/dt=4kA/\mu s$	
E_{OFF}	Turn-Off Switching Energy		28.3				
$t_{d(on)}$	Turn-On Delay Time		89		ns	$V_{DS}=800V, V_{GS}=-5/20V, I_D=950A, R_{G(ext)}=5\Omega,$	
t_r	Rise Time		94				
$t_{d(off)}$	Turn-Off Delay Time		302				
t_f	Fall Time		84				
Q_{gs}	Gate to Source Charge		390		nC	$V_{DS}=800V, V_{GS}=-5/20V, I_D=950A$	
Q_{gd}	Gate to Drain Charge		560				
Q_g	Total Gate Charge		1920				

Reverse Diode Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_{SD}	Diode Forward Voltage	3.7		V	$V_{GS}=-5V, I_{SD}=1200A, T_{VJ}=25^\circ C$	
		3.4		V	$V_{GS}=-5V, I_{SD}=1200A, T_{VJ}=150^\circ C$	
I_S	Continuous Diode Forward Current		1200	A	$V_{GS}=-5V, T_{VJ}=25^\circ C$	
			450	A	$V_{GS}=-5V, T_{VJ}=150^\circ C$	

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
I_{rrm}	Peak reverse recovery current		455	A	$V_{GS}=-5V, I_{SD}=950A, V_{R,DS}=800V, T_{VJ}=25^\circ C$	
			830	A	$V_{GS}=-5V, I_{SD}=950A, V_{R,DS}=800V, T_{VJ}=150^\circ C$	
Q_{rr}	Reverse recovery charge		21.4	nC	$V_{GS}=-5V, I_{SD}=950A, V_{R,DS}=800V, T_{VJ}=25^\circ C$	
			35.2	nC	$V_{GS}=-5V, I_{SD}=950A, V_{R,DS}=800V, T_{VJ}=150^\circ C$	

晁元國際半導體股份有限公司
MaxPower SiC Semiconductor Co., Ltd.


NTC Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
R ₂₅	Rated Resistance		5.0		kΩ	T _C = 25°C	
ΔR/R	Deviation of R ₁₀₀	-5		5	%	T _C = 100 °C R ₁₀₀ = 493 Ω	
P ₂₅	Power Dissipation			20	mW	T _C = 25°C	
B-25/50	$R_2 = R_{25} \exp [B_{25/50}(1/T_2 - 1/(298.15 K))]$		3375		K		
B-25/80	$R_2 = R_{25} \exp [B_{25/80}(1/T_2 - 1/(298.15 K))]$		3411		K		
B-25/100	$R_2 = R_{25} \exp [B_{25/100}(1/T_2 - 1/(298.15 K))]$		3433		K		

Package Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
L _{s,DS}	Stray inductance of module		7.2		nH	T _C = 25°C	
M _T	Mounting torque for module mounting	1.8	2.0	2.2	Nm	Screw M4 baseplate to heatsink	
W _P	Weight		415		g		

Circuit Schematic

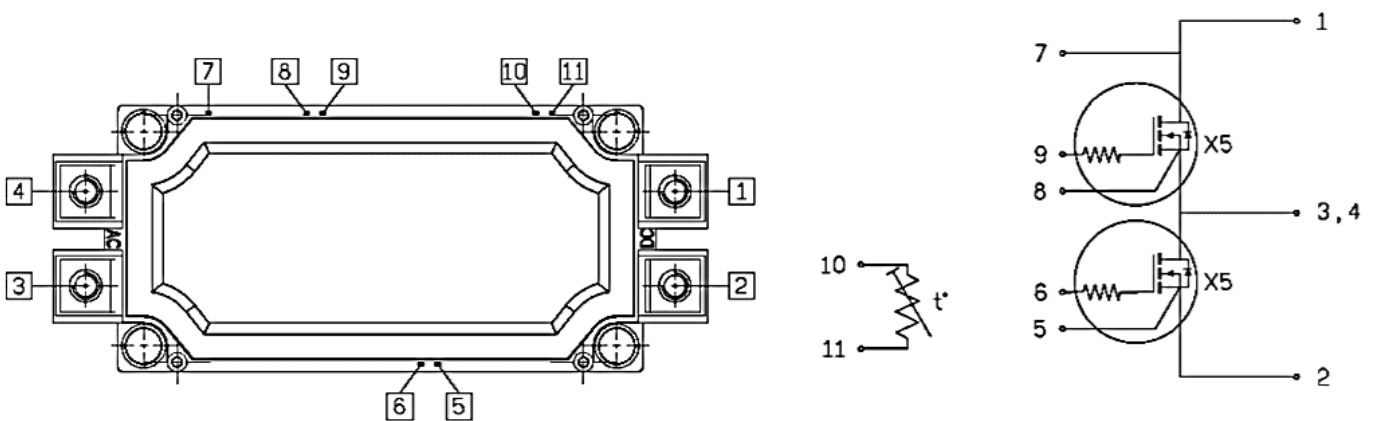

晁元國際半導體股份有限公司
MaxPower SiC Semiconductor Co., Ltd.

Package Dimension

